

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
15 September 2005 (15.09.2005)

PCT

(10) International Publication Number  
**WO 2005/084864 A1**

(51) International Patent Classification<sup>7</sup>: **B23G 9/00**

(21) International Application Number:  
PCT/IL2005/000267

(22) International Filing Date: 7 March 2005 (07.03.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
160767 7 March 2004 (07.03.2004) IL

(71) Applicant (for all designated States except US): **SHILO  
TECHNOLOGIES, LTD.** [IL/IL]; P.O. Box 27331, 91273  
Jerusalem (IL).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **ABRAHAM, Moshe**

[IL/IL]; Shilo, 44830 Mobile Post Ephraim (IL). **STAHL,  
Zeev** [IL/IL]; 43/4 Haim Toren Street, Pisgat Zeev, 97823  
Jerusalem (IL). **FREDKIN, Binyamin** [IL/IL]; Gush Et-  
zion, P.O. Box 179, 90433 Alon Shvut (IL).


(74) Agent: **WOLFF, BREGMAN AND GOLLER**; P.O. Box  
1352, 91013 Jerusalem (IL).

(81) Designated States (unless otherwise indicated, for every  
kind of national protection available): AE, AG, AL, AM,  
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,  
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,  
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,  
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,  
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,  
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ,  
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA,  
ZM, ZW.

(84) Designated States (unless otherwise indicated, for every  
kind of regional protection available): ARIPO (BW, GH,

[Continued on next page]

(54) Title: TOOL FOR REPAIRING DAMAGED SCREW THREADS

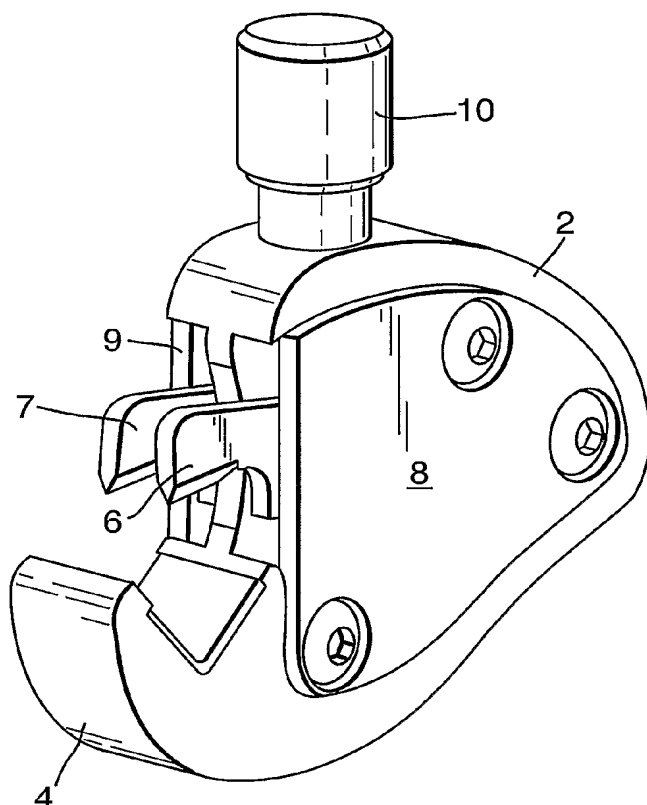

(57) Abstract: There is provided a tool  
for repair of damaged threads of screws,  
including a body (2) having a projecting  
portion (4) for accommodating a screw to  
be repaired and having two recessed major  
surfaces; a cutting blade (6), having a rear  
end hingedly articulated to the body (2),  
and a front end in the shape of a cutting face  
(46) substantially fitting the type of thread  
to be repaired; a guide blade (7) having a  
rear end hingedly articulated to the body  
(2), and a front end substantially fitting the  
type of thread to be repaired, the guide blade  
projecting beyond the cutting face of the  
cutting blade, and; means (10, 12, 14) to alter  
the distance between the front ends and the  
projecting body portion (4) to accommodate  
screws of different diameters.

WO 2005/084864 A1



GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**

— with international search report

— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.